90×90 MM SOLID SURFACE MOUNTING PLATFORM

INSTALLATION SOLID SURFACE MOUNTING PLATFORM - STONE, WOOD, GLASS & OTHER SOLID SURFACES

DESCRIPTION:

Applications:

Solid surface mounting platforms are designed for wall installations and they contain an integrated back mounting enclosure that seamlessly integrates the Lutron Alisse devices into the TRUFIG mounting system. The mounting platforms are available in 1/2" and 5/8" thicknesses and for a variety of wall coverings tile. The platform can accommodate solid surface materials from 3/8 to 1-1/4" thick.

Flush Finish:


Platform technology allows for a zero-sightline, flush finish. Paint-ready Fascias provide flexible finishing options including pains and veneers.

Fascias/Devices:

Accepts Lutron Alisse keypad.

Accessories:

Router Template - quicly and pricisley route Fascia opening in the field with a rigid Plexiglas router template Plaster shims - adjusts the mud dam in 1/16" increments to accommodate up to 3/8" plaster thickness





TECHNICAL:

Materials:

Panel -Pressed Gypsum (fire class A, 95% recycled material) material is impact, mold and moisture resistant.


Enclosure - 18 GA Galvanized Steel.

Environment:

For indoor use only - mounting platform can be used in damp locations such as kitchens, back-splashes, and bathrooms.

ORDERING INFO:

90X90 5/8 SOLID SURFACE MP 51254 90X90 1/2 SOLID SURFACE MP 51255

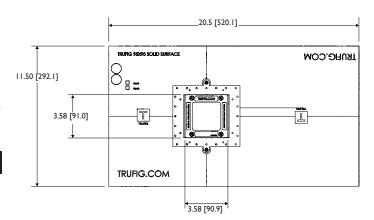

991 Calle Amanecer San Clemente, CA. 92673 (949) 492-7777

As part of its policy of continu-ous research and product devel-opment, the company reserves the right to change or withdraw specifications without pryor notice,

TRUFIG and the TRUFIG Logo are trademarks of Dana Innovations. © 2017 Dana Innovations. All rights reserved.



TYPE:
CATALOG:
PROJECT:
DATE:

TRUFIG.COM